



## ProFlow™ Series LoBoy™ Deck Carts

1350 Rockefeller Rd., Wickliffe, OH 44092, PH 440.943.4111, info@KtecInc.com, www.KtecInc.com

### LOBOY™ DECK CARTS

K-Tec low ground clearance carts deliver flexibility and top quality to complement **lean material flow** programs.

- Ultra-low Deck Heights
- Auto-release Floor Lock
- Auto-hitch and Self Stowing Towbar
- Low Push/Pull Force 4-Wheel System
- Top Cap Storage Pegs

### INDUSTRY LEADING DESIGN

Carts meet standard ergonomic limits for manual push / pull forces with heavy payloads and standup to tough loading conditions. FEA (finite element analysis) puts stiffness and weight where needed to produce carts as light and rugged as possible.

Innovations such as MPP™ (modified pivot point) caster steering allow significant improvements in tracking and turning resulting in low frame height and manual pushing capability. Numerous “attention to detail” features help K-Tec meet rigorous **safety**, reliability and durability standards. K-Tec ProFlow™ Series carts carry a **two (2) year warranty**.<sup>1</sup>

### COMMITMENT TO SUCCESS

K-Tec identifies and benchmarks relevant applications, addresses ergo/safety issues and provides on-site feasibility reviews where required. Application engineers are available by conference call or direct appointment to help walk through the early planning and front end design phase of lean material flow projects.<sup>2</sup>



Model Shown: KT2-49LNR



Model Shown: KT2-49LNR

K-Tec also designs ergo-support products such as lifts and conveyors to provide an integrated, dependable solution. A “try before you buy” **demo program** for qualified customers delivers a hands on look at our products without wasting investment dollars.


1. See web site for warranty detail. 2. May be subject to consulting charges.

**Distributed By:**

# Lean Material Flow Solutions

## LoBoy™ Deck Carts

1350 Rockefeller Rd., Wickliffe, OH 44092, PH 440.943.4111, info@Kteclnc.com, www.Kteclnc.com

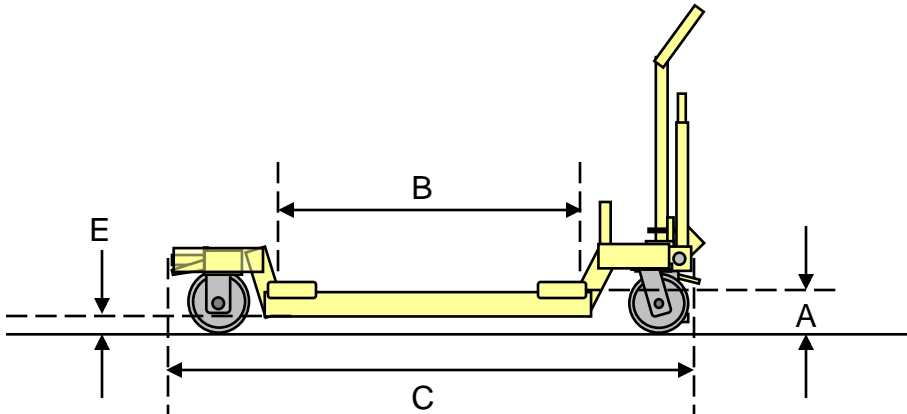

**LoBoy Deck Carts**

**Model: KT2-49NRL**

Dimensions	
Floor to Deck Height, A	4"
Usable Deck Size, B	49.5" x 49.5"
Overall Cart Length, C	71.3
Overall Cart Width, D	50.2
Floor to Frame Bottom Clearance, E	2"
Standard Features	
4-Wheel Caster Steer w/Kingpinless Swivels, Hybrid Low Push/Pull Force	✓
6-Wheel Caster Steer w/Kingpinless Swivels, Hybrid Low Push/Pull Force	✓
Welded Steel, Industrial-Duty Perimeter Frame w/Powder Paint Finish	✓
Weld Dunnage Lid (top cap) Support Pegs	✓
Precision Sealed Wheel and Swivel (rotational deck if applicable) Bearings	✓
"No-Bend" Heavy-Duty Auto-Hitch and Self Stowing, Reinforced Towbar	✓
Heavy Duty Floor Lock w/Auto-Release (towbar activated)	✓
Cart Tare Weight	305 lbs.
Deck Load Capacity	2000 lbs.
Rated Load Capacity (to meet ergo guidelines w/standard wheels)	1500 lbs.

Application photos, technical specifications and CAD drawings can be found on the web site at [www.Kteclnc.com](http://www.Kteclnc.com)